

F

E

D


C

B

A


4

4

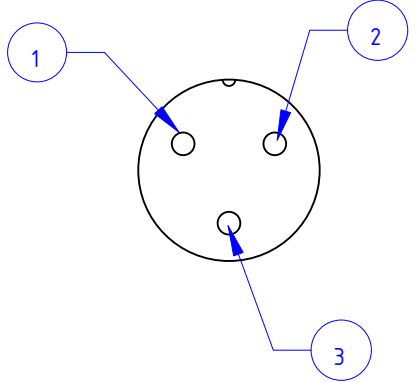

GX12 3pin / 5 Volt

- 1 GND (-)
- 2 nc
- 3 PWR (+)

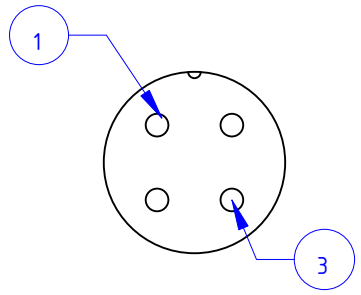


GX12 4pin / 12 Volt

- 1 GND (-)
- 2 nc
- 3 PWR (+)
- 4 nc


3

3

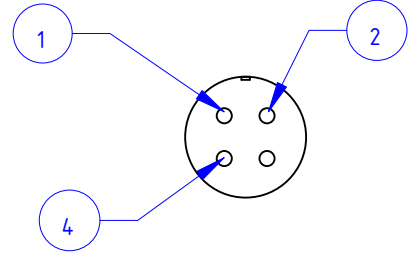

XS8 / DS1820

- 1 PWR (+)
- 2 GND (-)
- 3 nc
- 4 DATA

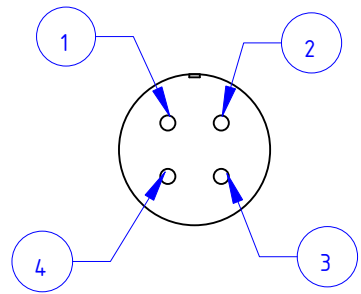

XS10 / Schrittmotor

- 1 B2 (schwarz)
- 2 B1 (grün)
- 3 A1 (rot)
- 4 A2 (blau)

2

2

1

1

Dargestellt ist die Sicht von innen auf die Buchse.

DESIGNED BY: K. Wicker		Reise-Esprit		G	—
DATE: 26.12.2023		Steckerbelegung		F	—
SIZE A4				E	—
SCALE 2:1	WEIGHT (kg) -	DRAWING NUMBER -	SHEET -	D	—
This drawing is our property; it can't be reproduced or communicated without our written consent.				C	—
				B	—
				A	—

F

E

D